


SR0801Shaft dia. $\phi 8$ Lead 1mm**Ct7&Ct10**

* Please refer to page A282 for stainless steel type.

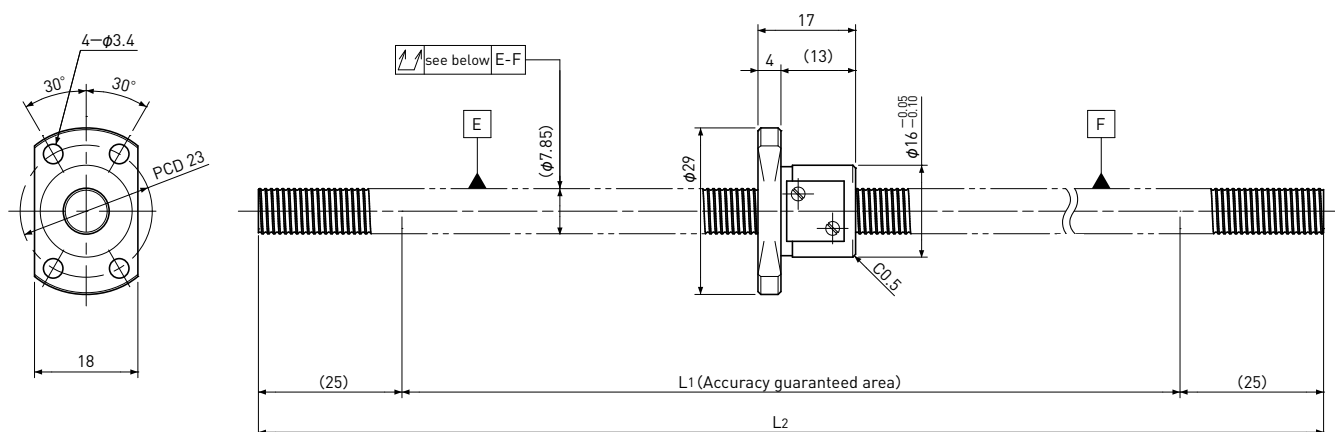

Unit:mm

Ball Screw Specifications	
Ball size	$\phi 0.8$
Number of thread	1
Thread direction	Right
Shaft root dia.	$\phi 7.3$
Number of circuit	3.7×1
Shaft, Nut material	SCM415H
Surface hardness	HRC58~62 (Thread area)
Anti-rust treatment	Anti-rust oil

Unit:mm

Ball Screw Model	Travel	Grade	Shaft length		Lead accuracy		Total Run-out	Axial play	Preload Torque Nm	Basic Load Rating N	
			L ₁	L ₂	Travel deviation e_p	Variation V_{300}				Dynamic Ca	Static Coa
SR0801-400R400C7	330	Ct7	350	400	± 0.06	0.05	0.120	~ 0.020	—	780	1650
SR0801-400R400C10	330	Ct10	350	400	± 0.24	0.21	0.240	~ 0.050			

Note) Please designate end-journal profile with your sketch.